
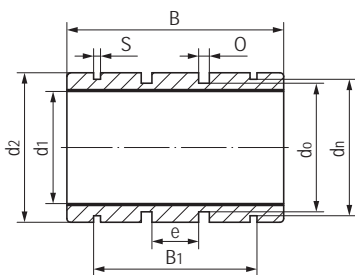


LINPB-11R-IN 封闭式精密直线轴承 Precision linear bearings, closed


- 封闭式长设计
 - 高精度与滚珠轴承相同
 - 标准滑动膜材料TEFPLAS® B
 - 阳极氧化铝合金适配器
 - 免维护、低噪音
 - 使用温度 ± 200℃
- Closed and long design
 - High precision similar to preloaded ball bearing
 - Standard liner material TEFPLAS® B
 - Anodized aluminum adapter
 - Maintenance-free and low noise
 - Operation temperature ± 200℃

标准规格 Standard specifications


产品编码 Part No.:

LINPB-11R-08-IN

- 英制 Inch size
- 内径 Inner diameter
- 封闭式保持器 Closed housing
- 长设计 Long design
- 滑动膜 Liner: TEFPLAS® B

座孔 Housing: H7 轴 Shaft: h6-h7

| 产品编码 Part No. | d ₁ [Inch] | | d ₂ [Inch] | | B [Inch] | | B ₁ [Inch] | d _n [Inch] | S [Inch] | O [Inch] | d ₀ [Inch] | e [Inch] |
|------------------|-----------------------|--------|-----------------------|--------|----------|--------|-----------------------|-----------------------|----------|----------|-----------------------|----------|
| | Min. | Max. | Min. | Max. | Min. | Max. | | | | | | |
| LINPB-11R-06-IN | 0.3752 | 0.3761 | 0.6240 | 0.6250 | 0.8600 | 0.8750 | 0.562 | 0.587 | 0.041 | 0.080 | 0.524 | 0.187 |
| LINPB-11R-08-IN | 0.5002 | 0.5013 | 0.8740 | 0.8750 | 1.2350 | 1.2500 | 0.875 | 0.820 | 0.048 | 0.125 | 0.712 | 0.250 |
| LINPB-11R-10-IN | 0.6252 | 0.6263 | 1.1240 | 1.1250 | 1.4850 | 1.5000 | 1.000 | 1.060 | 0.058 | 0.125 | 0.962 | 0.312 |
| LINPB-11R-12-IN | 0.7503 | 0.7516 | 1.2490 | 1.2500 | 1.6100 | 1.6250 | 1.062 | 1.177 | 0.058 | 0.125 | 1.087 | 0.312 |
| LINPB-11R-16-IN | 1.0003 | 1.0016 | 1.5613 | 1.5625 | 2.2350 | 2.2500 | 1.625 | 1.471 | 0.070 | 0.125 | 1.399 | 0.500 |
| LINPB-11R-20-IN | 1.2504 | 1.2519 | 1.9988 | 2.0000 | 2.6100 | 2.6250 | 1.875 | 1.889 | 0.070 | 0.125 | 1.837 | 0.625 |
| LINPB-11R-24-IN | 1.5004 | 1.5019 | 2.3738 | 2.3750 | 2.9850 | 3.0000 | 2.250 | 2.241 | 0.089 | 0.162 | 2.152 | 0.750 |
| LINPB-11R-32-IN | 2.0004 | 2.0022 | 2.9986 | 3.0000 | 3.9850 | 4.0000 | 3.000 | 2.839 | 0.105 | 0.189 | 2.775 | 1.000 |
| LINPB-11R-40-IN | 2.5004 | 2.5022 | 3.7484 | 3.7500 | 4.9850 | 5.0000 | 3.750 | 3.553 | 0.123 | 0.250 | 3.408 | 1.250 |

| 产品编码 Part No. | 轴径 Shaft [Inch] | 座孔 Housing [Inch] | F max. [N] | | 重量 Weight [g] |
|------------------|-----------------|-------------------|--------------------|-------------------|---------------|
| | | | 最大动载荷 Dynamic Load | 最大静载荷 Static Load | |
| LINPB-11R-06-IN | 3/8 | 0.6250 | 2082 | 4164 | 7.3 |
| LINPB-11R-08-IN | 1/2 | 0.8750 | 3985 | 7971 | 18.6 |
| LINPB-11R-10-IN | 5/8 | 1.1250 | 5990 | 11980 | 41.3 |
| LINPB-11R-12-IN | 3/4 | 1.2500 | 7793 | 15587 | 49.4 |
| LINPB-11R-16-IN | 1 | 1.5625 | 14424 | 28847 | 103.4 |
| LINPB-11R-20-IN | 1-1/4 | 2.0000 | 21055 | 42110 | 208.2 |
| LINPB-11R-24-IN | 1-1/2 | 2.3750 | 28895 | 57789 | 328.9 |
| LINPB-11R-32-IN | 2 | 3.0000 | 51430 | 102859 | 654.1 |
| LINPB-11R-40-IN | 2-1/2 | 3.7500 | 80416 | 160832 | 1277.3 |